## AERODROMES (AD)

### S29 Abeid Amani Karume international Airport – HTZA

Abeid Amani Karume International Airport is undergoing major rehabilitation expected to be completed on 13 May 2028. The rehabilitation and upgrading will be done in six (6) phases. This AIP supplement will be effective from 05 October 2026 to 22 February 2027.

I. Phase 1: New apron construction part A.
II. Phase 2: Apron construction part B and widening of taxiway C from 25 M wide to 62 M wide, part I
III. Phase 3: Apron works part C and widening of taxiway C from 25 M wide to 62 M wide, part II
IV. Phase 4: Taxiway C widening from 25 M wide to 62 M wide, part III
V. Phase 5: Terminal 1 apron construction
VI. Phase 6: Terminal 3 Ground Support Equipment system (GSE) and service roads works.

**A.** **Phase 1,** from 17 April 2026 to 21 September 2026, apron construction part A - completed, waiting for finalization and taxiway connecting the apron.

**B.** **Phase 2,** from **05 October 2026 to 22 February 2027**, apron construction part B and widening of taxiway C from 25 M wide to 62 M wide, part I

**WORKS DURING PHASE 2**

I. TWY C Widening with Asphalt towards RWY Side
II. TWY C Widening with Concrete towards new apron
III. Existing Aeronautical Ground Lightings (AGL) removal and refixing after widening
IV. TWY markings

Status and condition of TWY C during phase 2.

Due to taxiway rehabilitation works, the portion of taxiway C, between 43.5 M from the center of taxiway F and 162 M from the center of taxiway E, **will be temporarily closed.**

**AERODROME OPERATIONAL INFORMATION**

I. Pilots to adhere to Air Traffic Cntrollers (ATC) instructions.

II. All aircraft operations are prohibited on the closed portion

III. The closure period may be extended if required. Any extension will be promulgated by appropriate aeronautical information.


IV. Pilots shall exercise caution when operating in the vicinity of the work area

**CHART**

The affected portion of taxiway C and the applicable alternative for taxiing see the attachments to this AIP Supplement

**ATTACHMENT TO AIP SUP 29/26**

**AERODROME CHART - ICAO** 06°13'30"S 039°13'31"E ELEV 47 ft ZANZIBAR TWR 121.2/118.7 ZANZIBAR/ Abeid Amani Karume Intl.Airport

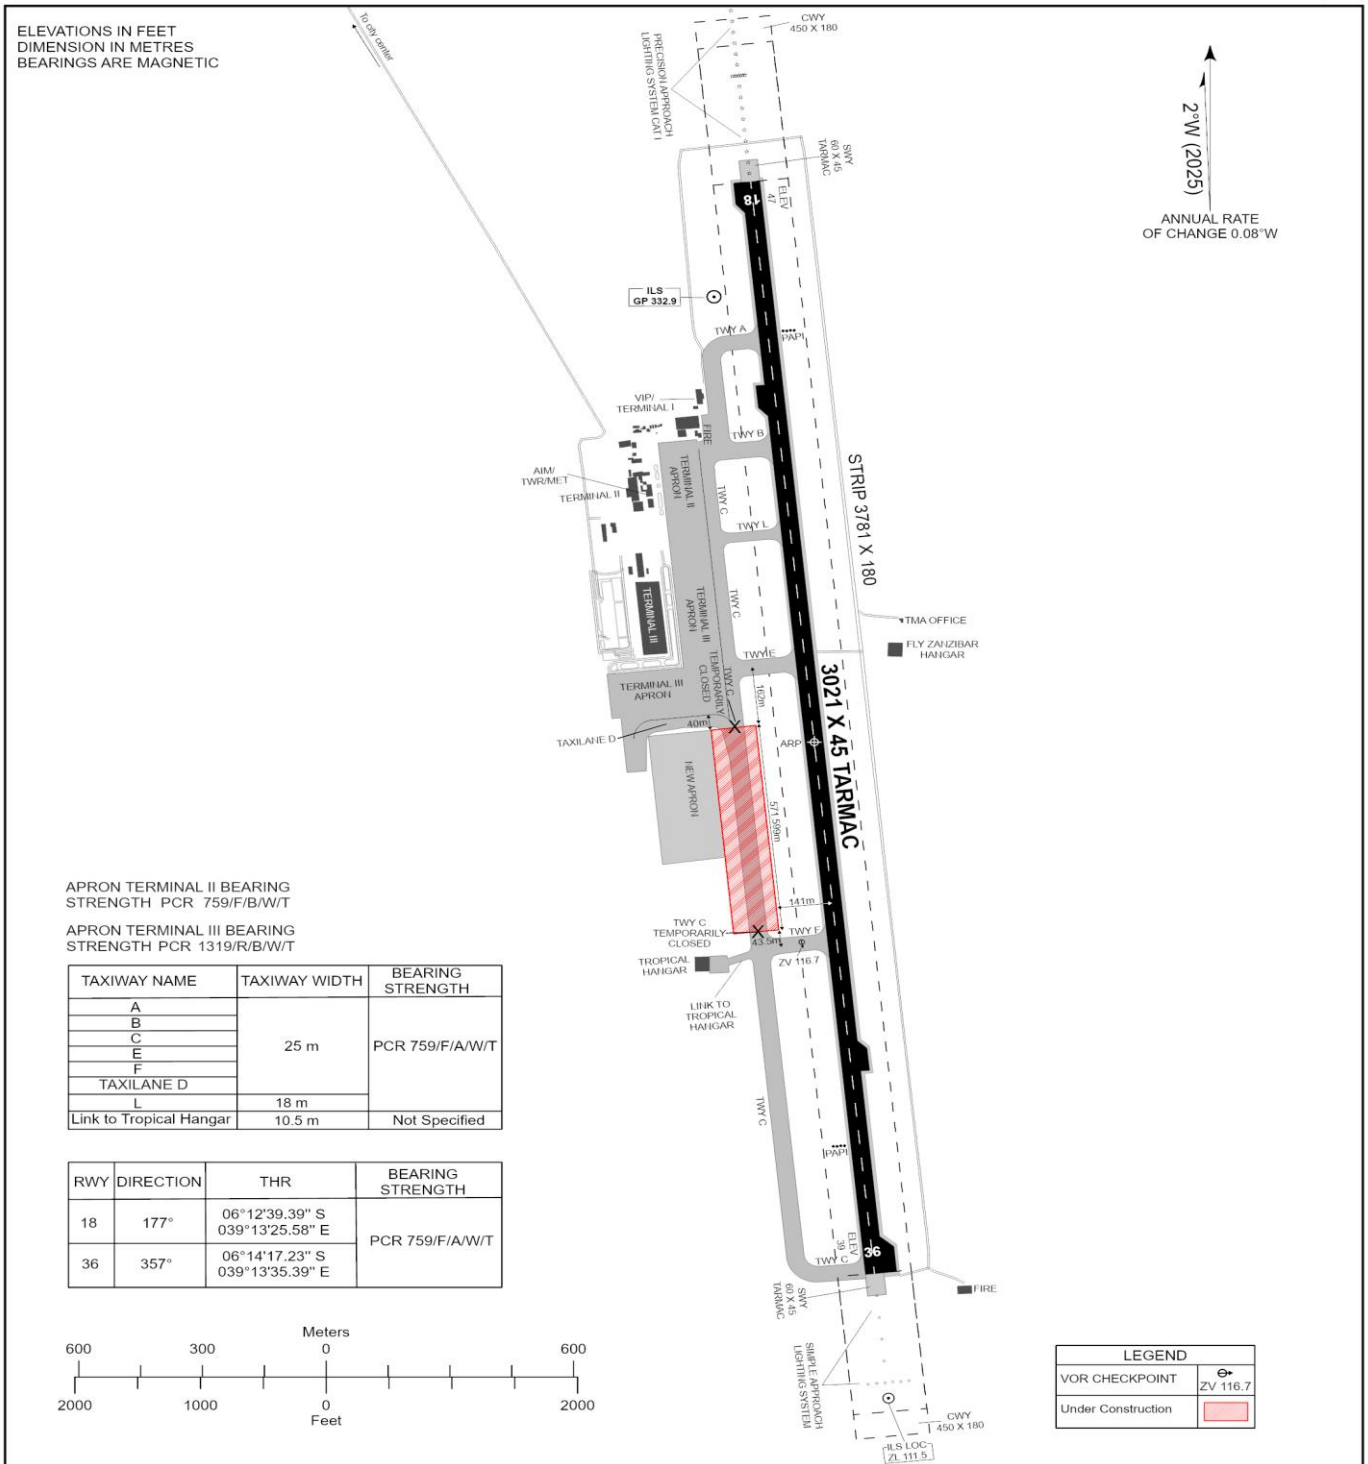


APRON TERMINAL II BEARING STRENGTH PCR 759/F/B/W/T

APRON TERMINAL III BEARING STRENGTH PCR 1319/R/B/W/T


| TAXIWAY NAME | TAXIWAY WIDTH | BEARING STRENGTH |
|---|---|---|
| A | 25 m | PCR 759/F/A/W/T |
| B | | |
| C | | |
| E | | |
| F | | |
| TAXILANE D | | |
| L | 18 m | |
| Link to Tropical Hangar | 10.5 m | Not Specified |

| RWY | DIRECTION | THR | BEARING STRENGTH |
|---|---|---|---|
| 18 | 177° | 06°12'39.39" S 039°13'25.58" E | PCR 759/F/A/W/T |
| 36 | 357° | 06°14'17.23" S 039°13'35.39" E | |

MARKING AIDS RWY 18/36 AND EXIT TWY



LIGHTING AIDS RWY 18/36 AND EXIT TWY



**TANZANIA CIVIL AVIATION AUTHORITY** **05 OCT 2026**